Contacts:
1 – STOP
2 – Trigger Lockdown [001]
3 – Test Message [002]
4 – Staff Alert [003]
5 – All Clear [004]
6 – Class Change [005]

Lockdown Trigger

Smartphone / PC / Tablet
Trigger messages
& cancel alerts
<ip address> /www/ppms.html
PIN 0000 (Can be changed)

Line level output
To Sound System

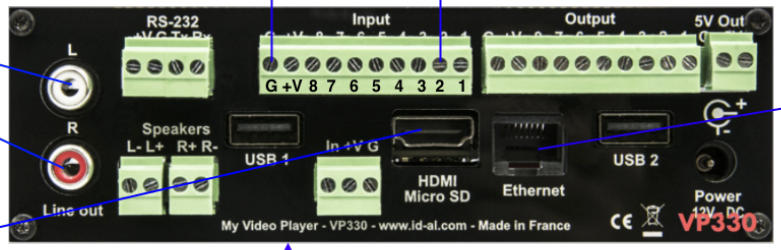

Connect to LAN

Connect monitor to initially discover and set IP address as advised by customer IT dept.

Web-based GUI for advanced settings
User: admin
Password: password

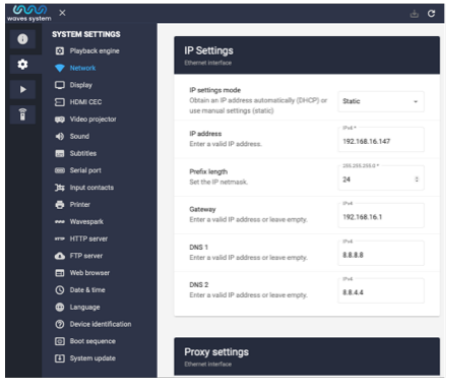

Use Waves Scheduler software to create class change schedule file and copy file to SD card.
https://waves-system.com/en/softwares-support/

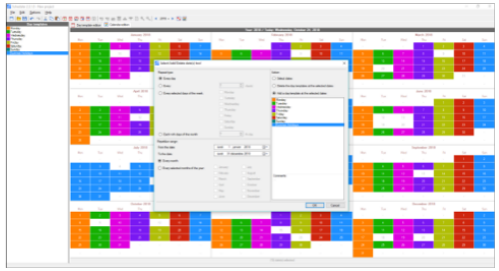

USB Flash Drive loaded with lockdown software & messages

Messages can be changed in these folders & relay outputs set as required.

- 000 [WEBS 001]
- 001 [J001][NT][RES 11111111] - Lockdown Alert
- 002 [J002][NT][RES 11111111] - Test Message
- 003 [J101][NT][RES 11111111] - Staff Alert
- 004 [J101][NT][RES 11111111] - All Clear
- 005 [RES 11111111] - Class Change
- 101 [RES 00000000] - Stop All Alerts
- System
- www

Commercial Audio Solutions

Lockdown+ System configuration

Date	24th Sept 2025
By	Neal Hollick