


# VM-300SV

## END OF LINE MODULE

For surveillance of one loudspeaker line on short circuit and break. Can be used with the VM-3000 system or the VX-3008F or VX-3016F.

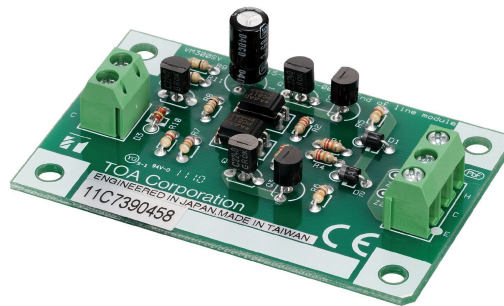

Article number: VM-300SV


### Specifications

Power source	Supplied from speaker line output
Power consumption	0,2 W
Control output	Line status
Input / Output	Speaker line input: screw connector, applicable cable diameter: AWG 24 – AWG 19 Contact output: Connected to the emergency contact input of VM-3240VA, VM-3360VA, VM-3240E, VM-3360E, Connector cable: Twisted pair cable (shielded type is recommended), Max. cable length: 10 m
Operating temperature	-5°C until +40°C
Certificates	EN 54-16
Dimensions	70 x 18 x 45 mm (W x H x D)
Gross weight	0,06 KG
Finish	Steel plate, surface-treated,
Weight	20 g

# VM-300SV

END OF LINE MODULE

Appearance

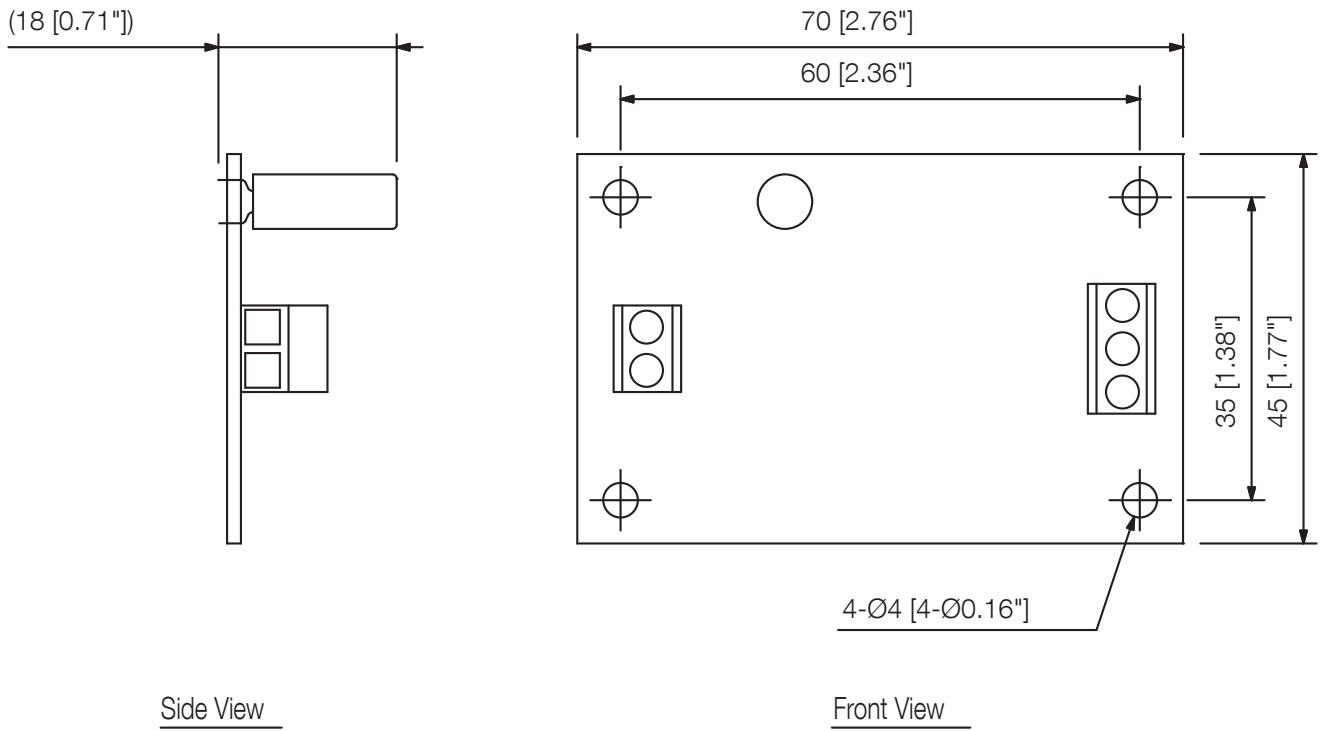

UNIT:mm

SCALE:1/1

Note: Numerical values in parentheses are for reference only.