



MXR 4500/6

RACK MOUNT AMPLIFIED MASTER UNIT



Description

MXR 4500 is the master unit of the Voice Alarm system DXT 4000, dedicated to rack mount small and medium size applications where an EN 54-16 certified system is required. It is equipped with powerful and exceptionally reliable Class D power amplifiers, able to provide up to 500 W of total power. Depending on the model, it is able to serve up to 6 independent zones, and the spare power amplifier facility is available. The internal power supply is certified EN 54-4. The on-board DSP platform allows optimizing environmental equalization, maximizing voice intelligibility and background music performance. Up to 8 units can be connected in a MASTER-SLAVE configuration, thanks to the natively included IE 3008 additional board. The system can be completed with emergency microphone consoles BM 3804, BM 3804FM and ME 3801, and the buttons extensions BE 3806, allowing to add live announcements functionality.

Features

- › 500 W total power
- › Up to 6 zones controlled
- › On-board DSP platform
- › Certified EN 54-16 and EN 54-4
- › Emergency messages on monitored SD card
- › Spare power amplifier facility
- › Integrated audio source on front panel
- › Rack mount installation (4U)
- › Up to 8 units connectable in a master-slave configuration

Part Number

12100069 MXR 4500/6


220-240/115 V Black - RAL 9005 EAN 8024530021788



MXR 4500/6

RACK MOUNT AMPLIFIED MASTER UNIT

Line Art 2D

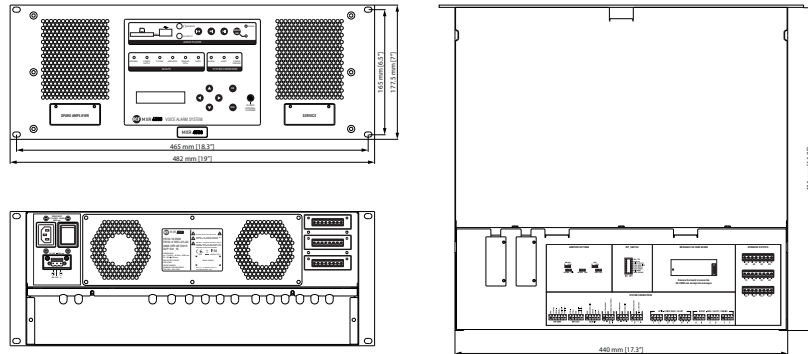

System specifications

TECHNICAL SPECIFICATIONS

Number of zones managed	6
Built-in power amplifier	Yes
Spare amplifier automatic change-over	Yes
Max number of consoles	4
Number of console buses	1
Number of simultaneous emergency audio channels	1
Max number of units connectable	8
Communication bus	Serial
Connection Cables	J-Type fire-rated
Integrated pre-recorded emergency messages	Yes

Amplifier specifications

Amplifier Class	D+
Number of channels	6
Power output (@ 100 V)	500 W RMS
A/B speakers line	Yes
Frequency Response (-3dB)	80 Hz ÷ 16 kHz
Signal/noise rate ("A" weighted)	>98 dB
Distortion (THD+N) @ 1 kHz nominal power	<0.3 %

Input section

Total number of inputs	3
Balanced	3
Mono	3
Line inputs	2
Line connectors	Euroblock, JACK
VOX	Yes
Paging inputs	1
Paging connectors	Euroblock
Paging command	Serial
Paging emergency	Yes
General Purpose Inputs (GPI)	6
Monitored GPI	6
Photo-coupled GPI	6



MXR 4500/6

RACK MOUNT AMPLIFIED MASTER UNIT

Output section	Signal output number	1	
	Signal output connectors	JACK	
	Power output lines	6	
	Power output connectors	Euroblock	
	General Purpose Outputs (GPO)	6	
Processing	DSP	Yes	
	Tone controls	Yes	
	High-pass filter	20 Hz ÷ 500 Hz	
Controls	Configuration	DIP switch, Front panel	
	Chime tone	Yes	
Protections	Cooling	Convection	
	Short circuit	Yes	
	Thermal	Yes	
	DC	Yes	
	Fuses	Yes	
	VHF (Very High Frequencies)	Yes	
Audio sources	USB pen drives	Yes	
	SD card	Yes	
Power requirement	Operating voltage	220-240/115 V~ 50/60Hz	
	Voltage selection	Internal	
	DC power	Yes	
	DC power value	48 V	
	Power consumption	700 W	
Standard compliance	IP protection grade	IP 30	
	Safety agency	CE compliant	
	EN54-16 certified	Yes	
	EN54-4 certified	Yes	
Physical specifications	Cabinet/Case Material	Metal	
	Color	Black - RAL 9005	
	Rack mounting	19", 4U	
Size	Height	178 mm / 7.01 inches	
	Width	482 mm / 18.98 inches	
	Depth	426 mm / 16.77 inches	
	Weight	14.2 kg / 31.31 lbs	
ACCESSORIES			
Cables Electronics	- BE 3806	14380036	8024530012120
	BH 1042	17360040	8024530011796
	BM 3022	14322013	8024530007034
	BM 3804	14380028	8024530012137
	BM 3804FM	14380037	8024530012885
	ME 3801	14322030	8024530015732
	CJ 428CAT	12399047	8024530016449
	BATT 18AH 2X	13360317	8024530015923
	EOL 3-9	17170176	8024530011864
	IT 3010	12399049	8024530016388
	MG 3006	13360344	8024530013356