




SCP-6121

IP Rated "Splashproof" Ceiling Loudspeaker

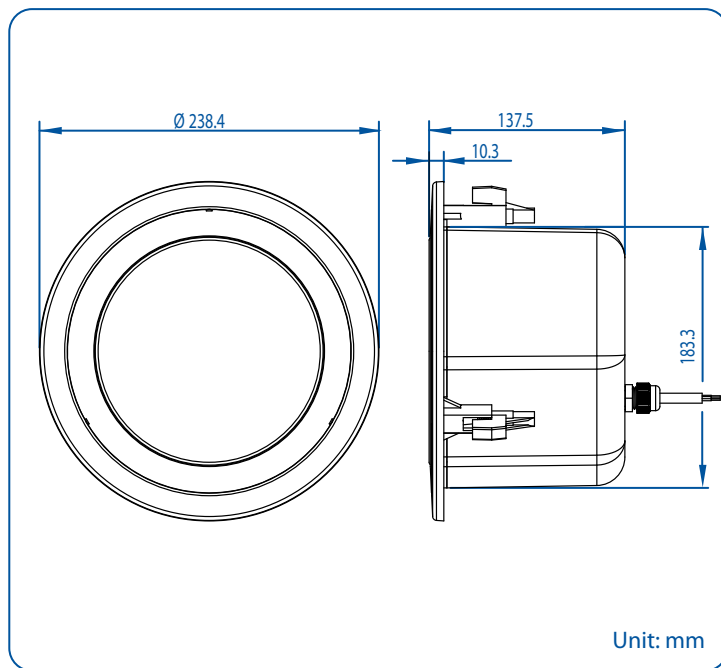

- ☒ 100 Hours Life Tested
- ☒ CE Certified (EMC & LVD)
- ☒ IP Rated
- ☒ Rustproof
- ☐ UL94V0
- ☐ BS 5839 Part 8
- ☒ EASE Data
- ☒ RoHS Compliance
- ☒ UV Protected
- ☒ Withstanding/Insulation Tested

- Ingress protected to IEC529 IP55.
- 6" full range polypropylene driver unit.
- Available in 100 volt & 70 volt and 8Ω.
- Sealed ABS rear enclosure with glanded cable tail. ABS baffle.
- Rotating mount tabs for easy installation.
- Suitable for non-shedding, "clean-room" environments.
- Also suitable for food processing plants or applications where significant moisture is present such as bathroom or steam sauna rooms.
- Finished in brilliant white (RAL 9016).

Model No.	SCP-6121
Rated Power (rms)	12W
Impedance	833Ω, 1.11kΩ, 1.67kΩ, 3.33kΩ, 10kΩ & 8Ω
Power Taps @ 100V	12W, 9W, 6W, 3W, 1W & 8Ω
Power Taps @ 70V	6W, 4.5W, 3W, 1.5W, 0.5W & 8Ω
SPL (1W / 1M)	91dB
Max. SPL (Rated W / 1M)	102dB
Frequency Range (-10dB)	130Hz ~ 20KHz
Dispersion 1K Hz / 4K Hz	220° / 65°
Ambient Temperature	-30°C ~ +60°C
Ingress Protection	IEC529 IP55
Power Selection	7-core cable
Material	Baffle: ABS, Grille: Aluminium, Enclosure: ABS.
Colour / Finish	White (RAL 9016)
Dimensions	238.4 (9.39) Dia. X 137.5 (5.41) Length mm. (in.)
Net Weight (ea)	2.00 kgs (4.44 lbs)
Mounting	Rotating Mount Tabs