



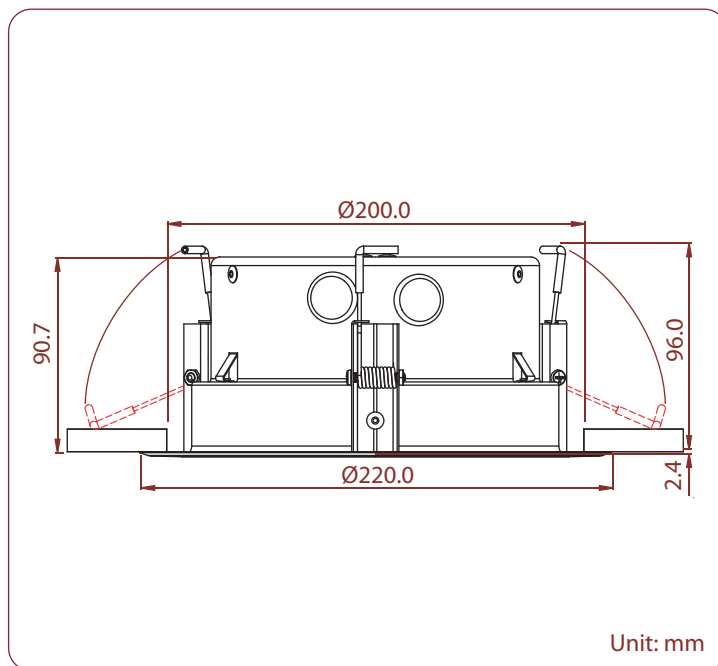

# CLM-6061VAF

## Metal Ceiling Loudspeaker

【 EN 54-24 】

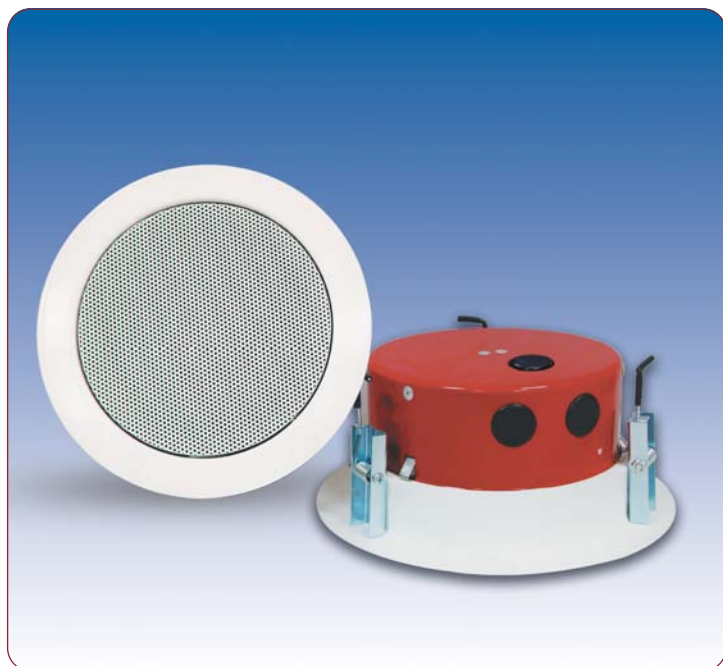

- ☒ 100 Hours Life Tested
- ☒ CE Certified (EMC & LVD)
- ☐ IP Rated
- ☐ Rustproof
- ☐ UL94V0
- ☒ BS 5839 Part 8 & EN 60849
- ☒ EASE Data
- ☒ RoHS Compliance
- ☐ UV Stable
- ☒ Withstanding/Insulation Tested

- EN 54-24 certified. Certification No. 1438-CPD-0329
- Compliant with British Standard BS 5839 part 8 and EN 60849
- Two cable entries to enable loop in loop out installation
- Mild steel construction capable of withstanding temperature of 650°C
- Ceramic termination blocks and fire resistant internal cabling
- 150°C thermal isolating fuse
- Super low profile grille and fire dome design. Ideal for shallow ceiling voids
- Easy snap-on fire dome
- Fitted with a twin cone driver unit
- A great alternative for the price conscious customer
- Finished in white



| Model No.                | CLM-6061VAF                                      |
|--------------------------|--------------------------------------------------|
| Rated Power (rms)        | 6W                                               |
| Impedance                | 1.67kΩ, 3.33kΩ & 6.67kΩ                          |
| Power Taps @ 100V        | 6W, 3W & 1.5W                                    |
| Power Taps @ 70V         | 3W, 1.5W & 0.75W                                 |
| SPL (1W / 1m)            | 94dB                                             |
| Max. SPL (Rated W / 1m)  | 102dB                                            |
| Frequency Range (-10dB)  | 130 Hz ~ 20k Hz                                  |
| Dispersion 1k Hz / 4k Hz | 126°/112°                                        |
| Operating Temperature    | -30°C ~ +60°C                                    |
| Power Selection          | Plug                                             |
| Material                 | Baffle: Steel, Grille: Steel, Fire dome: Steel   |
| Colour / Finish          | White                                            |
| Dimensions               | 220.0 (8.66) Dia. X 98.4 (3.87) Height mm. (in.) |
| Cutout Size              | 200.0 (7.87) Dia. mm. (in.)                      |
| Net Weight (ea)          | 1.34 kg (2.95 lb.)                               |
| Mounting                 | Quick spring clips and snap-on fire dome         |

■ **Rated Power according to IEC 60268- 5 100 hours Power Handling Capacity standard**