




WSM-5061VA

Metallic Wall Loudspeaker

【 EN 54-24 】

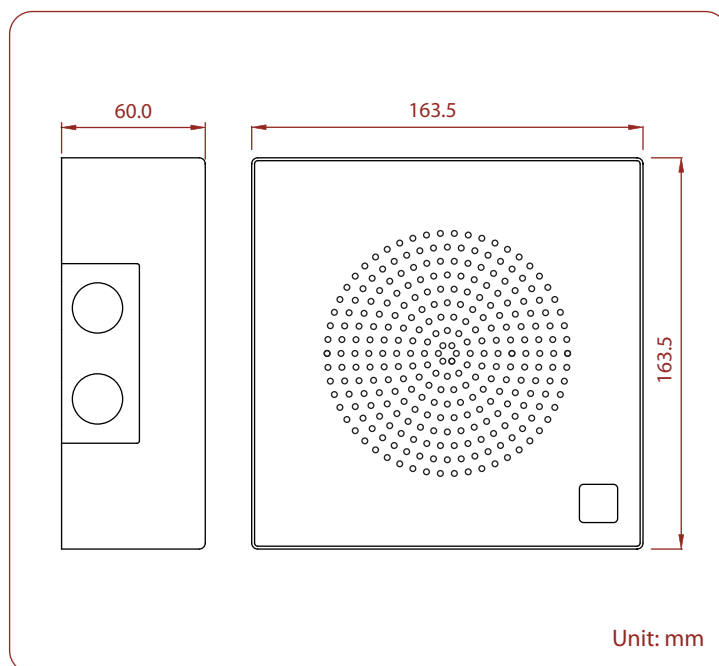

- ☒ CE Certified (EMC & LVD)
- ☐ IP Rated
- ☐ Rustproof
- ☐ UL94V0
- ☒ Withstanding/Insulation Tested
- ☒ BS 5839 Part 8 & EN 60849
- ☒ EASE Data
- ☒ RoHS Compliance
- ☐ UV Stable

- EN 54-24, BS 5839 part 8 and EN 60849 compliant
- Two cable entries to enable loop in loop out installation
- Vandal - proof
- Fitted with a 5" twin cone driver unit
- Designed to wide response for music & speech
- Finished in white



Model No.	WSM-5061VA
Rated Power (rms)	6W
Impedance	1.67kΩ, 3.33kΩ, 6.67kΩ & 13.33kΩ
Power Taps @ 100V	6W, 3W, 1.5W & 0.75W
Power Taps @ 70V	3W, 1.5W, 0.75W & 0.375W
SPL (1W / 1m)	90dB
Max. SPL (Rated W / 1m)	98dB
Frequency Range (-10dB)	190 Hz ~ 18kHz
Dispersion 1k Hz / 4k Hz	175° / 65°
Operating Temperature	-30°C ~ +60°C
Power Selection	Plug
Material	Housing: Steel
Colour / Finish	White
Dimensions	163.5 (6.44) X 163.5 (6.44) X 60.0 (2.36) mm. (in.)
Net Weight (ea)	2.00 kg (4.41 lb.)
Mounting	Screw