




SOP-5200 Sound Projector

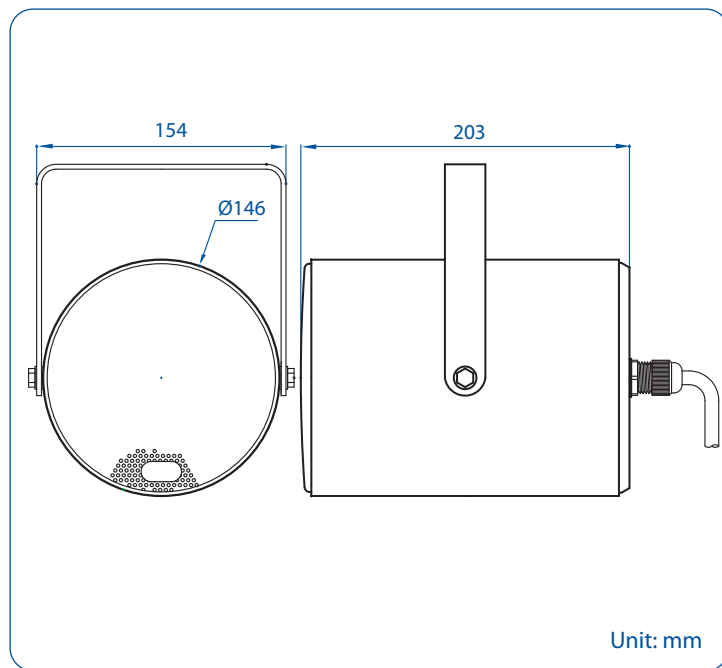

- ☒ 100 Hours Life Tested
- ☒ CE Certified (EMC & LVD)
- ☒ IP Rated
- ☒ Rustproof
- ☒ UL94V0
- ☐ BS 5839 Part 8
- ☒ EASE Data
- ☒ RoHS Compliance
- ☒ UV Protected
- ☒ Withstanding/Insulation Tested

- Designed to give controlled directional sound characteristics.
- 20 watt 100 & 70 volt line. Tappings via 6-core cable.
- IP rated to IEC529 IP66.
- Wide bandwidth alternative to horn speakers - ideal for music and speech applications.
- High impact ABS housing with UV Protection.
- Available in White (RAL 9016).

Model No.	SOP-5200
Rated Power (rms)	20W
Impedance	250Ω, 500Ω, 1kΩ, 2kΩ & 4kΩ
Power Taps @ 100V	20W, 10W, 5W & 2.5W
Power Taps @ 70V	20W, 10W, 5W, 2.5W & 1.25W
SPL (1W / 1M)	91 dB
Max. SPL (Rated 20W / 1M)	104 dB
Frequency Range (-10dB)	120 Hz ~ 20K Hz
Dispersion 1K Hz / 4K Hz	210° / 45°
Ambient Temperature	-30°C ~ +60°C
Water Protection	IEC529 IP66
Power Selection	6-core cable
Material	Housing: High impact ABS, Grille: Aluminium
Colour / Finish	White (RAL 9016)
Dimensions	150 (5.91) Dia. X 203 (8) L mm. (in.)
Net Weight (ea)	2.0 kgs (4.41 lbs)
Mounting	U Type Aluminium Bracket