




SCP-4060

IP Rated "Splashproof" Ceiling Loudspeaker

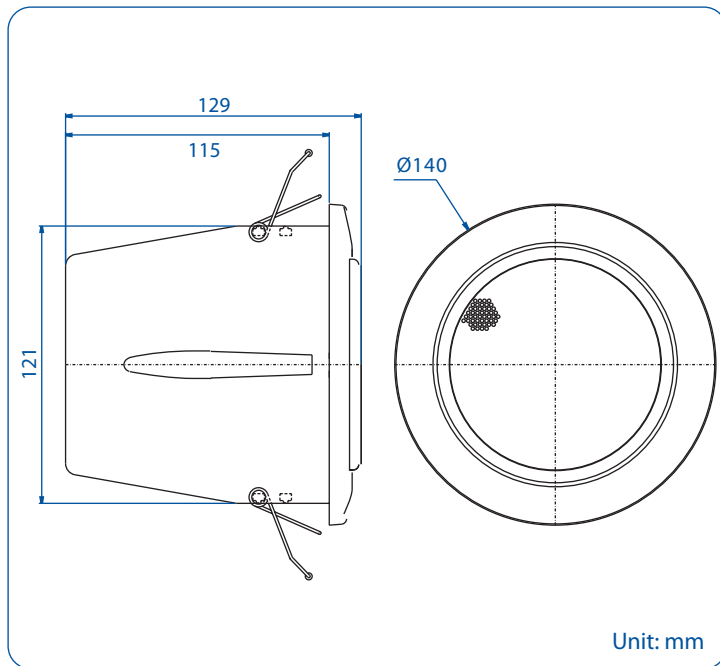

- ☒ 100 Hours Life Tested
- ☒ CE Certified (EMC & LVD)
- ☒ IP Rated
- ☒ Rustproof
- ☒ UL94V0
- ☐ BS 5839 Part 8
- ☒ EASE Data
- ☒ RoHS Compliance
- ☐ UV Protected
- ☒ Withstanding/Insulation Tested

- IP rated to IEC529 IP55.
- 4" full range polypropylene driver unit.
- Sealed UL94V0 ABS rear enclosure with glanded cable tail. UL94V0 ABS baffle.
- Available in 100 volt, 70 volt and 8Ω.
- Stainless steel mounting springs and exterior hardware.
- Suitable for non-shedding, "clean-room" environments.
- Also suitable for food processing plants or applications where significant moisture is present such as bathroom or steam sauna rooms.
- Finished in brilliant white (RAL 9016).

Model No.	SCP-4060
Rated Power (rms)	6W
Impedance	883Ω, 1.67kΩ, 3.33kΩ, 6.67kΩ
Power Taps @ 100V	6W, 3W, 1.5W & 8Ω
Power Taps @ 70V	6W, 3W, 1.5W, 0.75W & 8Ω
SPL (1W / 1M)	88 dB
Max. SPL (Rated 6W / 1M)	95 dB
Frequency Range (-10dB)	150 Hz ~ 20K Hz
Dispersion 1K Hz / 4K Hz	210° / 130°
Ambient Temperature	-30°C ~ +60°C
Water Protection	IEC529 IP55
Power Selection	7-core cable
Material	Baffle: UL94V0 ABS, Grille: Aluminium, Enclosure: UL94V0 ABS.
Colour / Finish	White (RAL 9016)
Dimensions	140 (5.51) Dia. X 135 (5.31) Height mm. (in.)
Cutout Size	130 (5.12) Dia. mm. (in.)
Net Weight (ea)	0.96 kgs (2.12 lbs)
Mounting	Stainless Steel Spring